


# ALUPONT B / 74




Vertical Frames B / 74

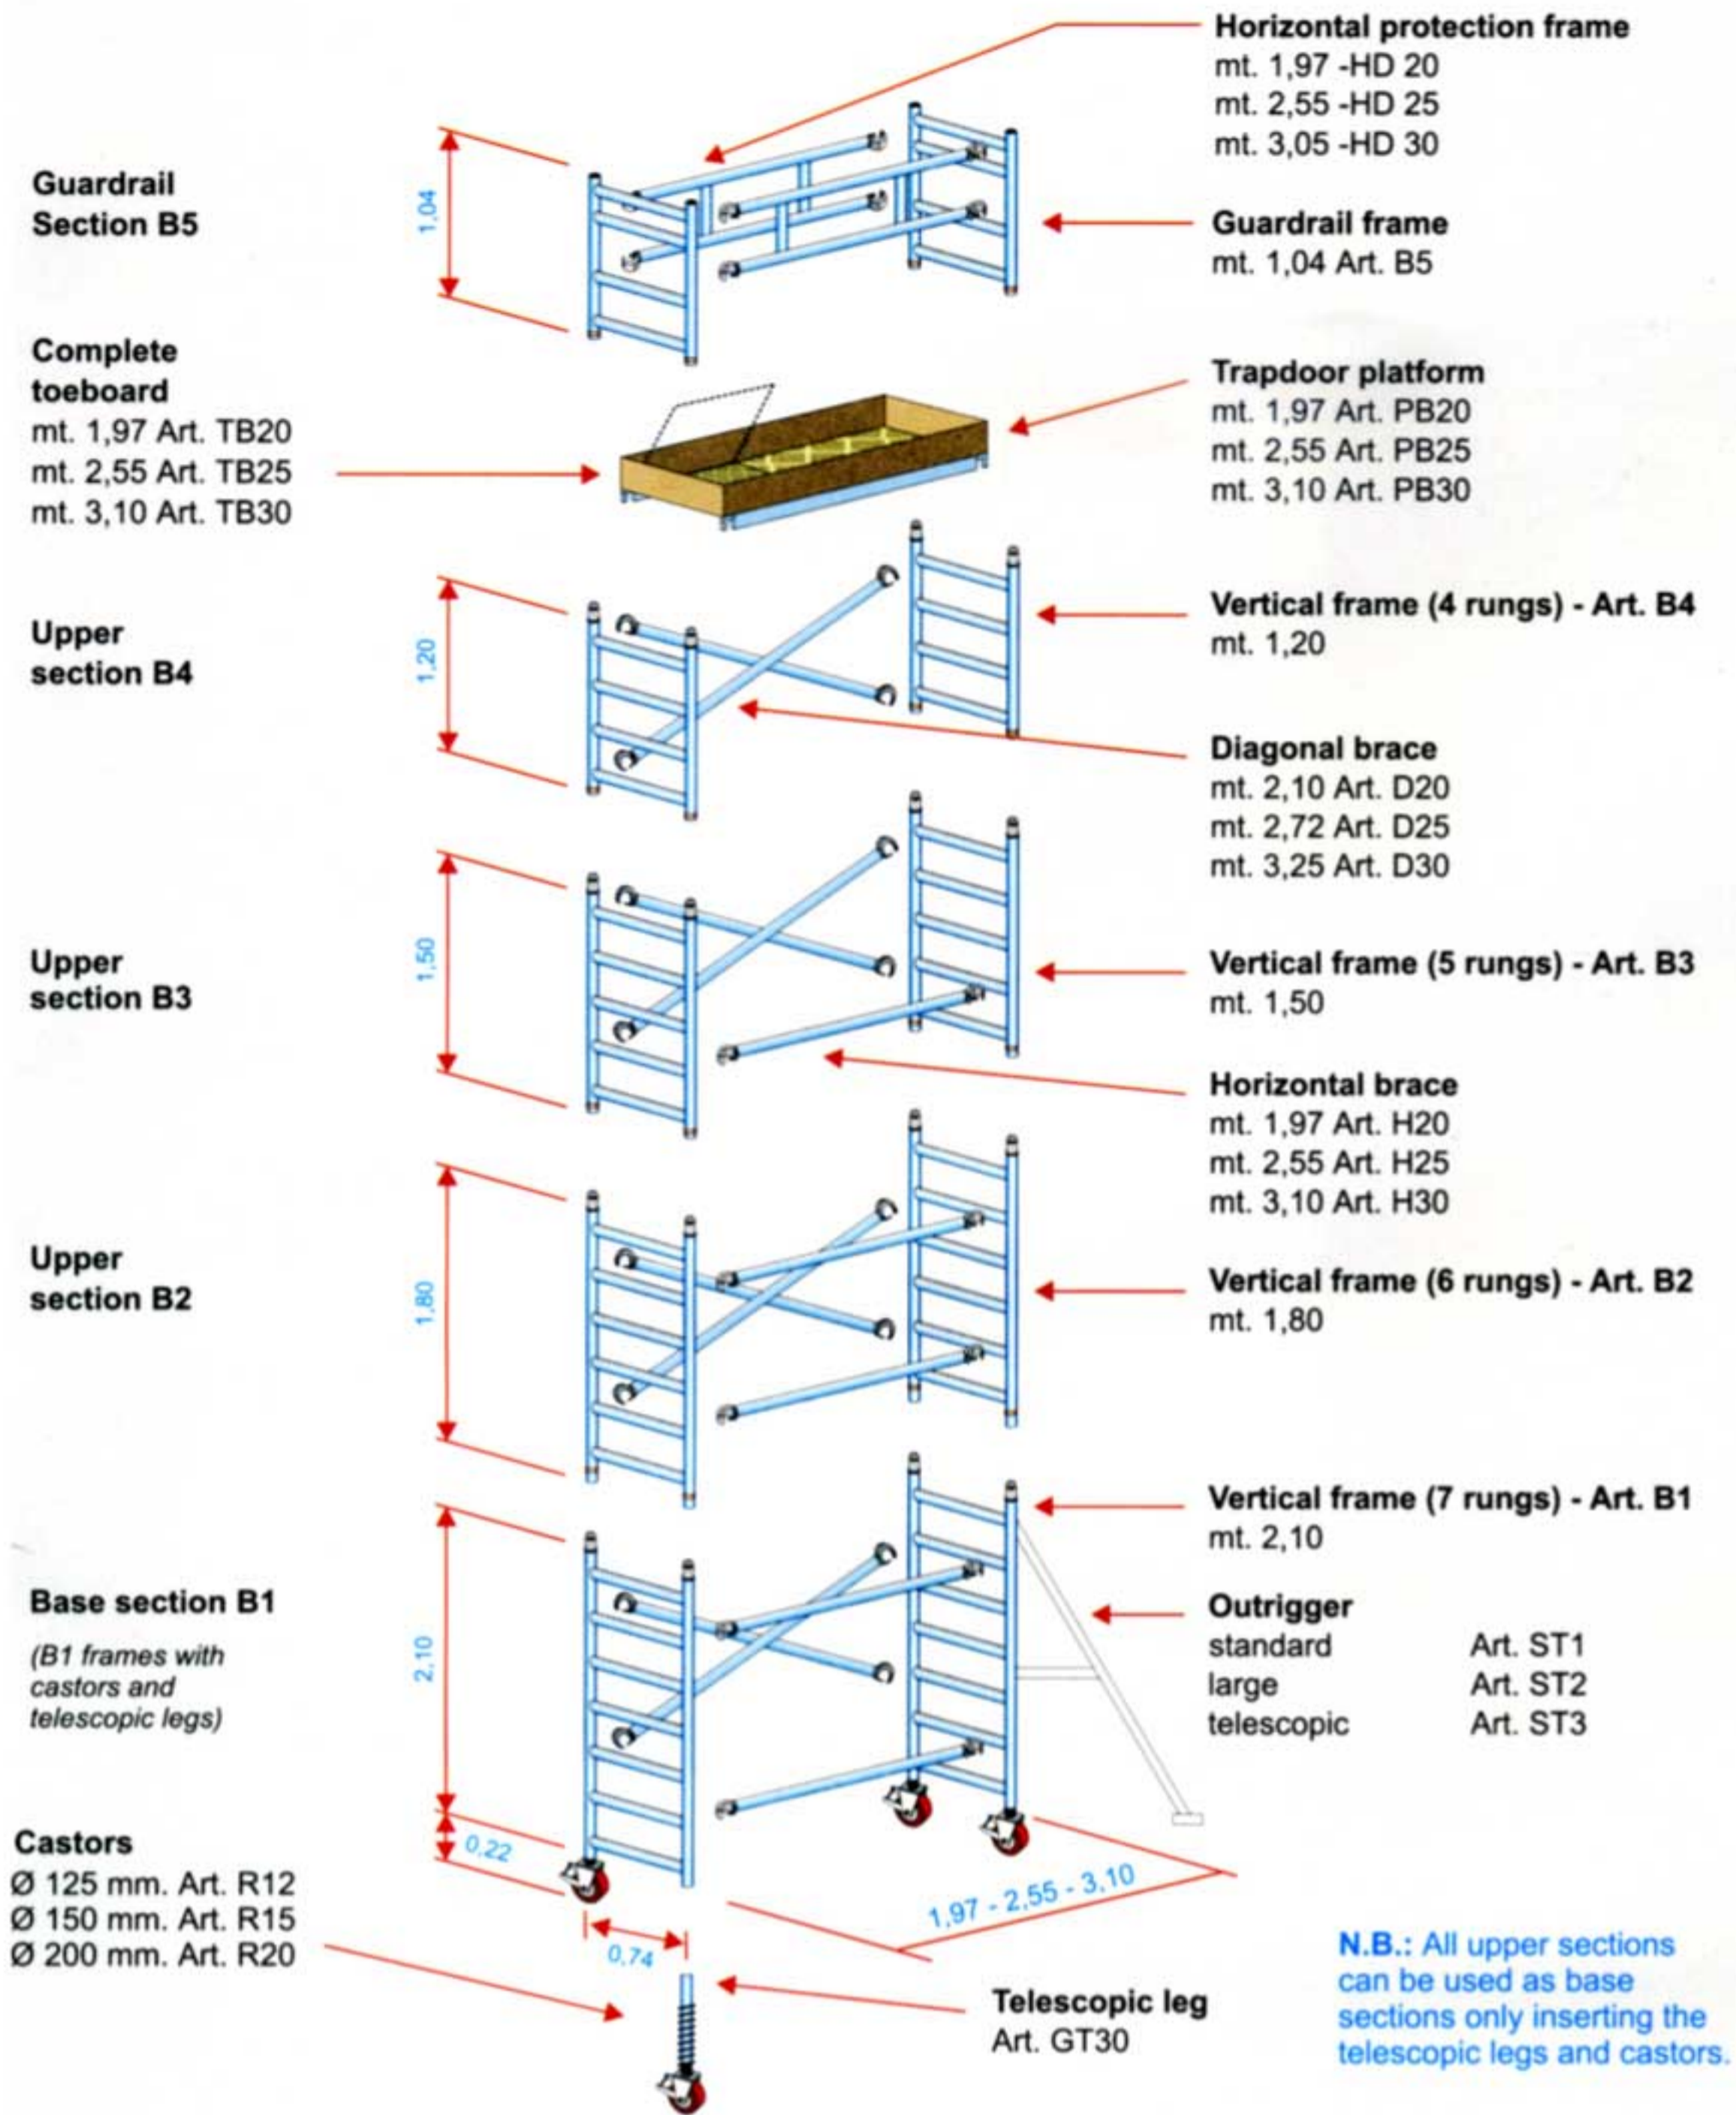

LOADS B / 74		CLASSE 3	
Safety weight load:		200 kg/m <sup>2</sup>	
Maximum load on B / 74 length 1,97:		230 kg.	
Maximum load on B / 74 length 2,55:		300 kg.	
Maximum load on B / 74 length 3,10:		365 kg.	

ALUPONT B / 74		Dimensions 0,74 x 1,97 - 0,74 x 2,55 - 0,74 x 3,10														
		INSIDE														
Working height	MT.	4,17	5,97	7,77	9,57	11,37										
Structure height	MT.	3,36	5,16	6,96	8,76	10,56										
Platform height	MT.	2,17	3,97	5,77	7,57	9,37										
Length	MT.	1,97	2,55	3,10	1,97	2,55	3,10	1,97	2,55	3,10	1,97	2,55	3,10			
TOTAL WEIGHT	KG.	72	81	92	104	114	126	135	151	168	153	170	188	202	224	248

# ALUPONT F / 135

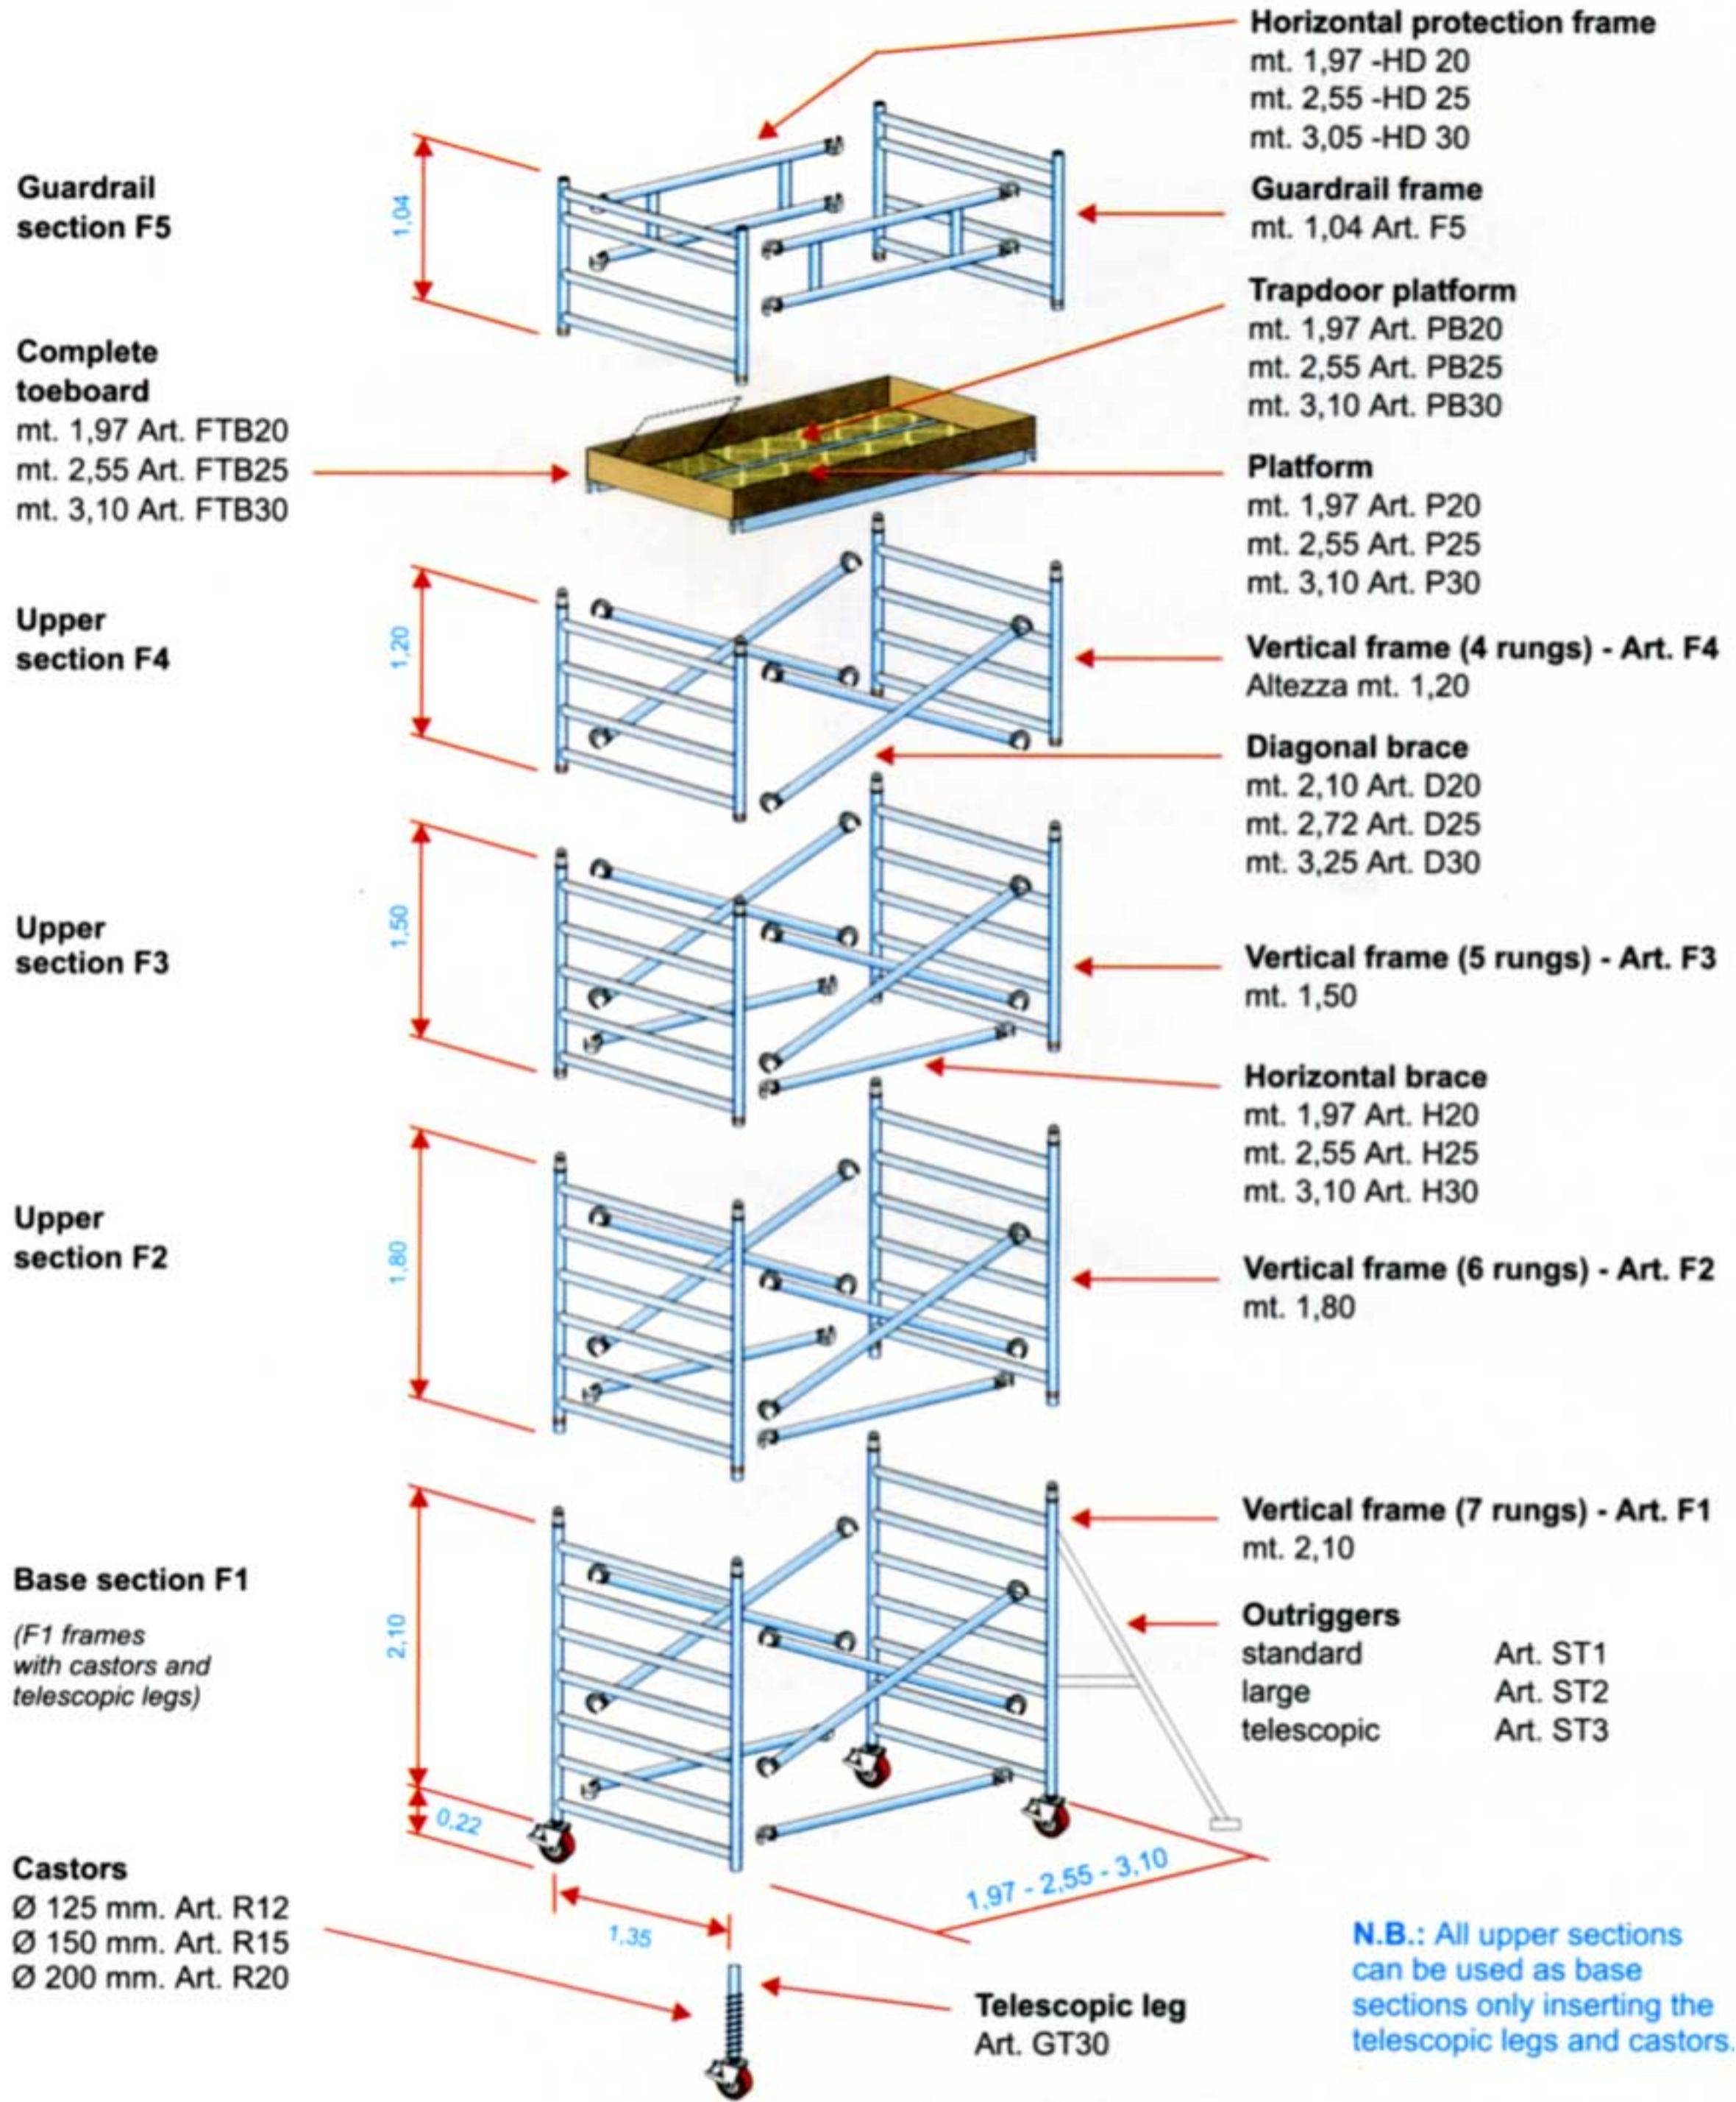

Vertical Frames F / 135



LOADS F / 135		CLASSE 3-2	
Safety weight load on F / 135 length 1,97 e 2,55 mt:			200 kg/m <sup>2</sup>
Safety weight load on F / 135 length 3,10 mt:			150 kg/m <sup>2</sup>
Maximum load on F / 135 length 1,97:			460 kg.
Maximum load on F / 135 length 2,55:			600 kg.
Maximum load on F / 135 length 3,10:			550 kg.

ALUPONT F / 135		Dimensions 1,35 x 1,97 - 1,35 x 2,55 - 1,35 x 3,10																								
		INSIDE																								
Working height	MT.	4,17	5,97	7,77	9,57	11,37	13,17	14,97	16,77	18,57	20,37															
Structure height	MT.	3,36	5,16	6,96	8,76	10,56	12,36	14,16	15,96	17,76	19,56															
Platform height	MT.	2,17	3,97	5,77	7,57	9,37	11,17	12,97	14,77	16,57	18,37															
Length	MT.	1,97	2,55	3,10	1,97	2,55	3,10	1,97	2,55	3,10	1,97	2,55	3,10													
TOTAL WEIGHT	KG.	101	114	130	146	162	178	194	210	226	242	258	274	290	306	322	338	354	370	386	402	418	434	450	466	482


# ACCESSORIES

## Horizontal brace

mt 1,97 ART. H20  
mt 2,55 ART. H25  
mt 3,10 ART. H30

## Diagonal brace

mt 2,18 ART. D20  
mt 2,72 ART. D25  
mt 3,25 ART. D30

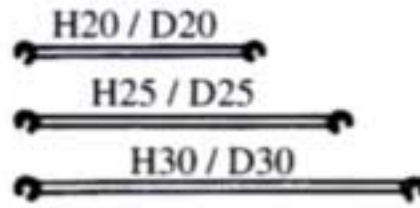

## Caster

Ø 150 mm ART. R15  
Ø 200 mm ART. R20


## Base plate

ART. PB30






## Adjustable leg

ART. GT30

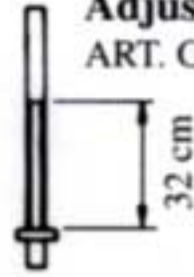

## Outriggers

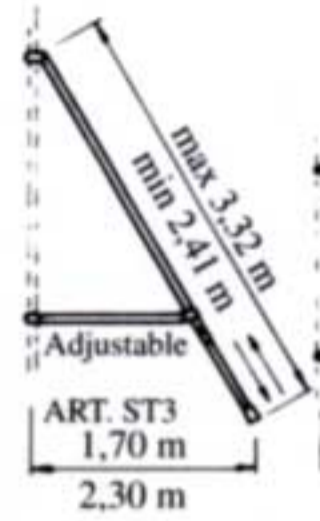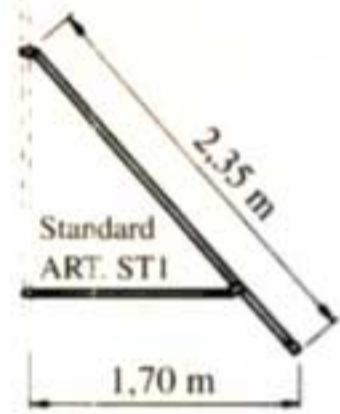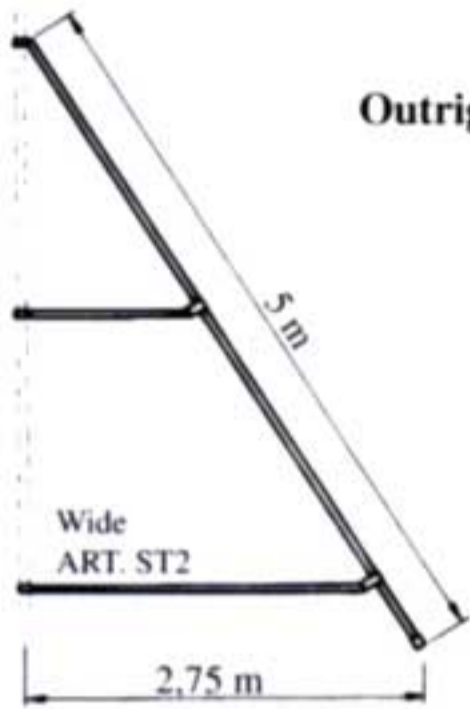

## Protection frame


mt 1,97 ART. HD20  
mt 2,55 ART. HD25  
mt 3,10 ART. HD30



## Outrigger with caster


### Standard

ART. ST4

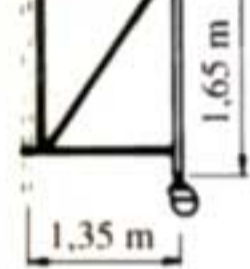

### Wide

ART. ST5

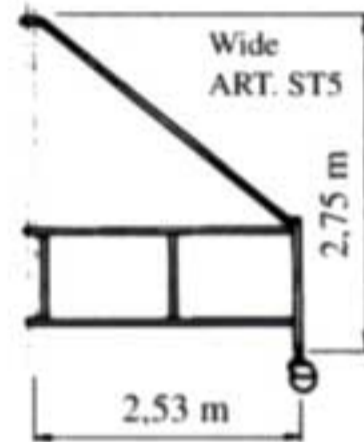

## Trapdoor

mt 1,97 ART. PB20  
mt 2,55 ART. PB25  
mt 3,10 ART. PB30



## Toeboard B / 74

mt 1,97 ART. TB20  
mt 2,55 ART. TB25  
mt 3,10 ART. TB30




## Standard platform

mt 1,97 ART. P20  
mt 2,55 ART. P25  
mt 3,10 ART. P30



## Toeboard F / 135

mt 1,97 ART. FTB20  
mt 2,55 ART. FTB25  
mt 3,10 ART. FTB30

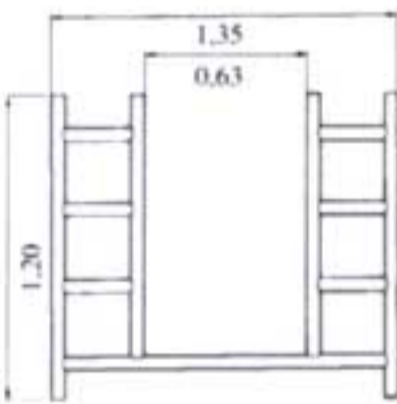

## Special guard rail frame


## Rung (or step) ladders

ART. FIP (L)

ART. FIPB (L)




(For Base Section)

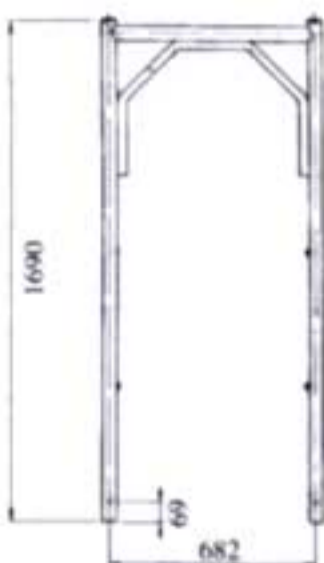

## Walk through frame

## Connection truss

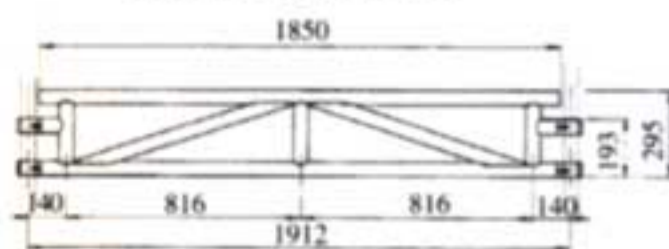

(Available in various lengths)